



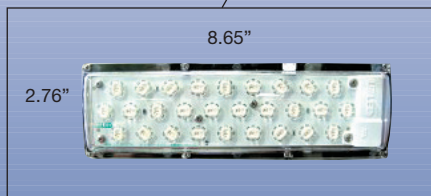

**INTRODUCING THE  
HRT SERIES  
LED  
ALUMINUM OR  
STAINLESS STEEL  
UL/CUL LISTED (UL 844)  
CLASS I, DIV. 2  
GROUPS A, B, C & D  
UL LISTED (UL595)  
MARINE OUTDOOR USE  
IP66**

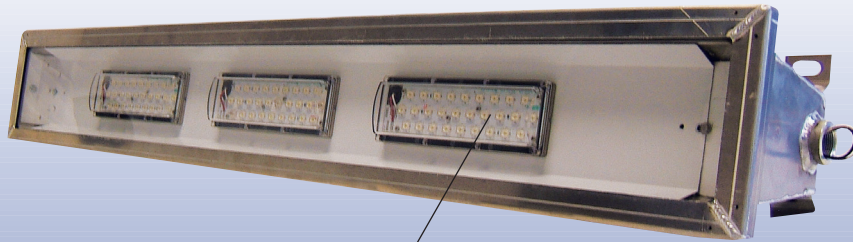

- Each LED module contains 28 individual LED's and is powered by a constant current driver for maximum efficiency
- Advanced heat-pipe heat sink reduces the size of the module and ensures optimal thermal management
- 2,650 lumens per module @ 5700K (CRI>70), 2200 lumens @ 4000K (CRI>80)
- 33.8W of power consumption per driver/module combination
- Driver operates at 120-277V, 50/60HZ
- 60,000 hours L70, expected life at 40°C ambient
- 5 year warranty on driver/module system
- Available in 2' or 4' lengths with up to 4 modules in 4' aluminum model (3 modules with stainless steel model)

Also available for retrofit applications, contact factory for additional information.


- **Waste Water Treatment Plants • Coastal Areas**
- **Hazardous Storage • Cold Storage**
- **Limited Access Installations • Industrial Facilities • Retrofits**

# HRT SERIES ALUMINUM


## ORDERING INFORMATION

SERIES	# OF LED MODULES	DISTRIBUTION PATTERN	VOLTAGE	OPTIONS
<b>HRT4</b>	<b>3L</b>	<b>C</b>	<b>U</b>	-----
<b>SERIES</b> ALUMINUM HRT2 = 2' HRT4 = 4' STAINLESS HRT2SS = 2' HRT4SS = 4'	<b># OF LED MODULES</b> 1L = 1 LED MODULE 2L = 2 LED MODULES 3L* = 3 LED MODULES 4L* = 4 LED MODULES** *4' MODEL ONLY ** ALUMINUM MODEL ONLY	<b>DISTRIBUTION PATTERN</b> C = CIRCULAR R = RECTANGULAR SQ = SQUARE	<b>VOLTAGE</b> U = 120-277 (<10% THD)	<b>OPTIONS</b> SC4 = 4' STAINLESS STEEL SAFETY CABLE TW = 3/8" HUBS ON BOTH ENDS FOR THRU WIRING 316 = 316 STAINLESS STEEL HOUSING AND DOOR FRAME


## DISTRIBUTION PATTERNS



CIRCULAR



SQUARE



RECTANGULAR

## DIMENSIONS

