

Specification

Specification/ Model	VT30W27V2D50K	VT40W27V4D50K	VT55W27V4D40K	VT80W27V8D50K	VT110W27V8D50K
Input Power	30	40	55	80	110
Lumens output	4000	5150	6750	10300	13500
Efficacy	133	129	123	129	105
CRI	82				
Color Temperature	5000				
Input Voltage	120-277	120-277	120-277	120-277	120-277
Finish Color	White				
Lens	Polycarbonate (UL Recognized) (f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion				
Mounting	Recessed				
Motion Sensor	120-277V				
Backup Battery	90min				

Ordering Guide


EXAMPLE: MS -VT 30W 27V 4D 50K M B

Luminaire Type	Power Consumption	Voltage	Dimension	CCT	Accessory (Option)	Accessory (Option)
VT Vapor Tight Light	30W 30 Watts	27V 120-277V	2D 2 Foot	40K 4000K	(Blank) Without Motion Sensor M Motion Sensor	B Backup Battery
	40W 40Watts		4D 4 Foot	50K 5000K		Blank Without Backup Battery
	55W 55Watts		8D 8 Foot			
	80W 80Watts					
	110W 110Watts					


Dimension

unit: mm/inch


2'

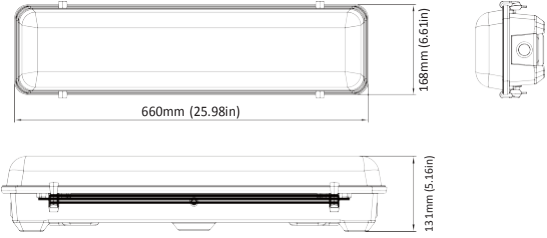

4'

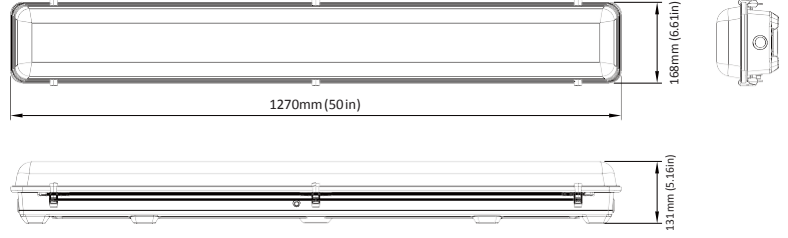


8'

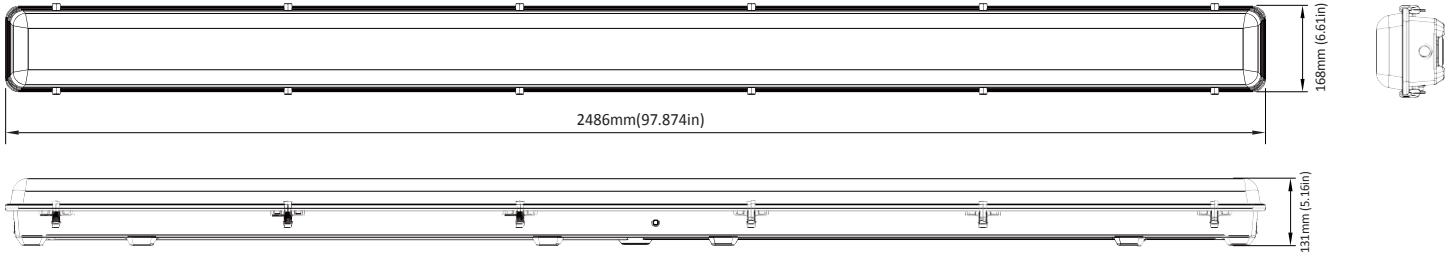


Photometrics

VT30W27V2D40KY

Luminous Intensity Distribution Curve




Illuminance at a Distance




VT40W27V4D40KY

Luminous Intensity Distribution Curve




Illuminance at a Distance



VT55W27V4D40KY

Luminous Intensity Distribution Curve



Illuminance at a Distance

