


FYT-200W

Feature:

- ◆ IP65, Corrosion-proof, water-proof and dust-proof
- ◆ 22,000 Lumen
- ◆ High quality Meanwell driver
- ◆ Warranty: 5 years
- ◆ Patent Design



Application:

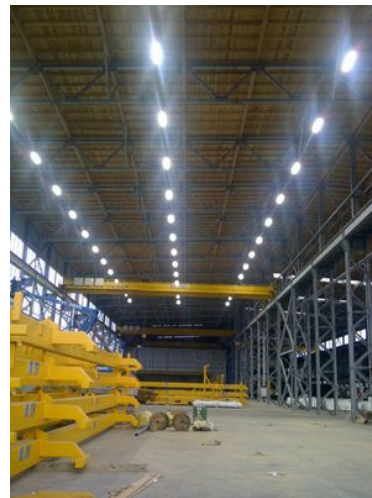


E469084



Z1A 14 07 82747 009

FYT-T200W brings brand-new idea for LED High Bay lighting with very high brightness as well as protection of IP65. The diffused lens cuts down on glare. IP 65 gives you the ability to blow the fixtures off to clean with water or air. Used in warehouses, factories, food plants, dusty environments, wet environments.

Dimensions:

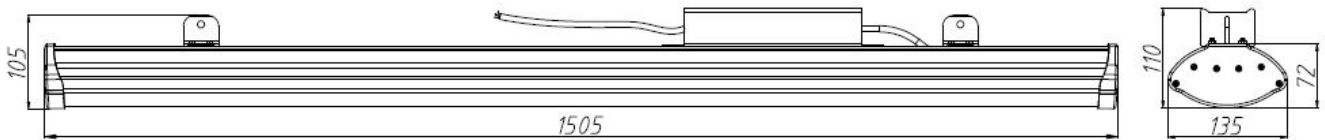



Specifications:

Model Name	FYT-T200W
Size	L- 5ft. W- 5.9 in. H- 2.8 in
Material	Aluminum & PC cover (clear and milky cover)
Working Voltage	100-277V AC 50~60Hz
Power	200W
Lumen	22,000 lm
Beam Angle	120°
LED Chip	588PCS SMD2835
Color Temperature	3000K~6500K
CRI	>80
IP Grade	IP65
Power Driver	Meanwell HLG-240H-48A
Operation Temperature:	-40~45 °C
Operation Humidity:	10%~90%
Power Factor:	>0.95
THD:	<15%
Lifetime	50,000 Hours
Warranty	5 Years
Package	19.2kg
Certificates	UL, TUV, DLC,

FYT-T200W-CW
LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: FYT-T200W CW	TYPE:LED 2835	WEIGHT:6.8KG
SPEC.:T200W	DIAM.: 1505*135*110mm	SERIAL No.:1
MFR.: FYT	SUR.:1460*105mm	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 114.54 lm/W
MODEL	FYT-T200W CW	Imax(cd)	8593	S/MH(C0/180)	1.18	
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.22	
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	23228	UP, DN(C0-180)	1.1, 49.4	
NOMINAL FLUX(lm)	23228.3	CIE CLASS	DIRECT	UP, DN(C180-360)	1.0, 48.6	
LAMPS INSIDE	1	up(%)	2.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	230	down(%)	98.0	CIBSE SHR MAX	1.35	

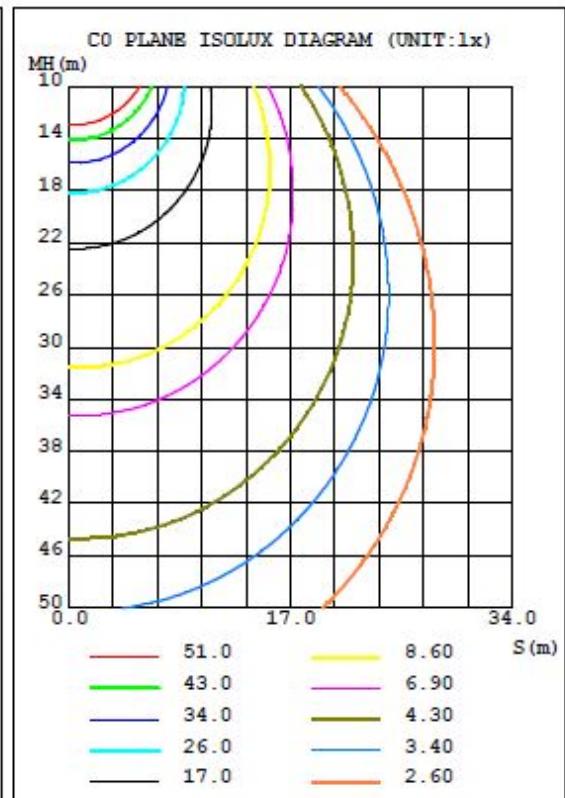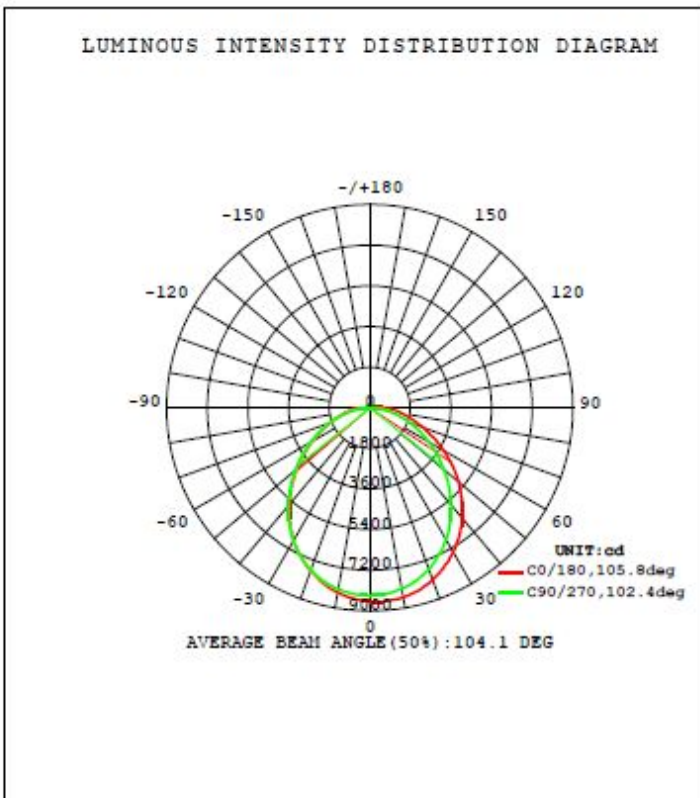

Installation:

