

NON-METALLIC HAZARDOUS LOCATION C1D2, C2D2
IR1-4-2-LED-DR-UNV - 80 watt

4-FT., 2 Strip LED Array (80-watt), HAZARDOUS LOCATION FIXTURE



FIXTURE FEATURES

Intended Use

Intended for hazardous location applications:

- Class I, Div. II - Groups A, B, C, D
- Class II Div. II - Groups F,G

Designed for applications requiring corrosion and dust resistant fixtures. Excellent for marine wet and damp locations. Inside of fixture is drip-proof. Typical applications include solvent storage, coal plants, petrochemical facilities, marine facilities, waste treatment plants and food processing applications.

Construction

- Housing is non-metallic glass reinforced polyester. Gasket is poured in-place. Latches are stainless steel locking type. Diffuser is high impact acrylic
- Surface mounting brackets are standard with fixture.

Listings

UL 1598-A – Outdoor Marine Rated (salt water)
UL 844 – Class I, Div 2, A,B,C,D, C2D2,
F,G Meets Coast Guard Specifications

Approximate Fixture Dimensions

Length: 52-inches
Width: 7 5/8-inches
Height: 5 1/4-inches


Mounting

Fixture can be surface mounted or suspended.

Warranty

Fixture is warranted for five years from delivery date against manufacturing defects.

NON-METALLIC HAZARDOUS LOCATION C1D2, C2D2
IR1-4-2-LED-DR-UNV 80 watt

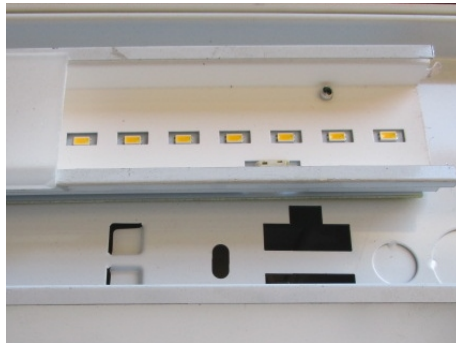

LEDSTRIPS

Fixture is equipped with 2 - LED Array Strips. Each strip is 40 watts and produces 5,000 lumens. So fixture consumes 80 watts total and produces 10,000 lumens. For ordering please refer to the below part numbers. For emergency back up add – EM to end of part #

IR1-4-2-LED-DR-UNV

Dimensions

A= 6 3/4"
B= 5 1/4"
C= 7 5/8 "
D= 36 9/16 "
E= 52"

