




## Basic Data


| Product Number | Wattage | Color Temp. | Voltage          | Lumens | Warranty | CRI |
|----------------|---------|-------------|------------------|--------|----------|-----|
| EX-20W C2YZDA  | 20      | 4000K-5700K | 100-277/200-480V | 2800   | 5 years  | 70  |
| EX-60W C2YZDA  | 60      | 4000K-5700K | 100-277/200-480V | 8400   | 5 years  | 70  |
| EX-80W C2YZDA  | 80      | 4000K-5700K | 100-277/200-480V | 11200  | 5 years  | 70  |
| EX-100W CYZDA  | 100     | 4000K-5700K | 100-277/200-480V | 14000  | 5 years  | 70  |
| EX-150W CYZDA  | 150     | 4000K-5700K | 100-277/200-480V | 21000  | 5 years  | 70  |
| EX-200WC3YZDA  | 200     | 4000K-5700K | 100-277/200-480V | 28000  | 5 years  | 70  |
| EX-300W C3YZDA | 300     | 4000K-5700K | 100-277/200-480V | 42000  | 5 years  | 70  |

“C,C2,C3”=Product code, “Y”=D or N: Dimmable or non-dimmable “Z”= CCT, from 4000~5700K “D”=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120° A for glass info. blank for flat glass, C for spherical glass.

## Dimensions

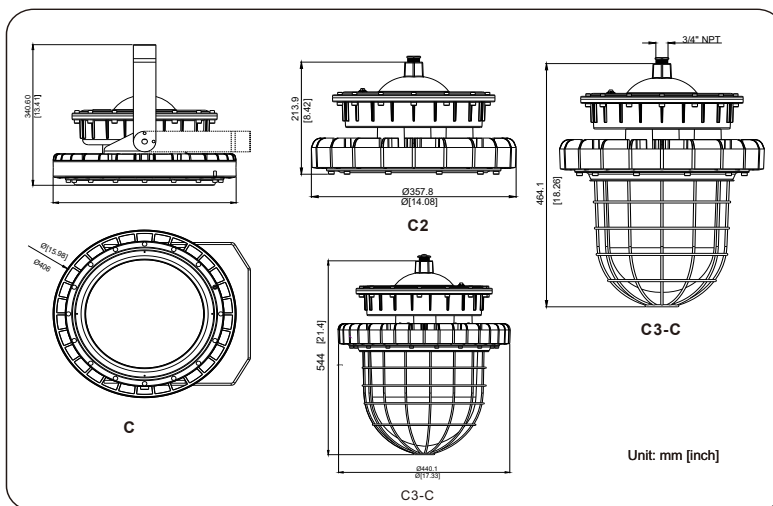

## Lighting Distribution

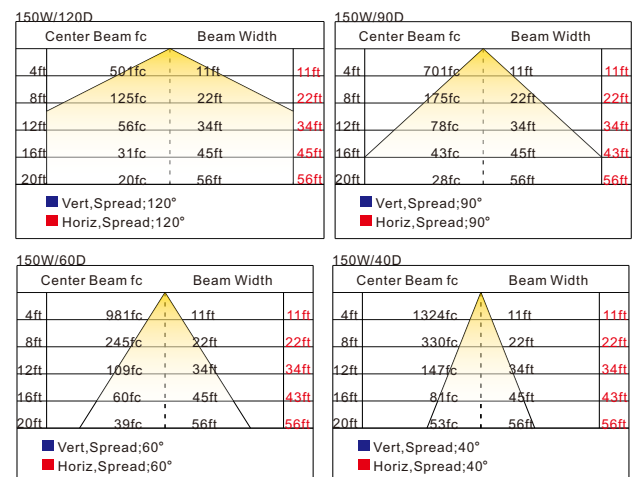

## Approvals

|                                   |                                                                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Marking Atex                      |  II2 G Ex db IIC T6 Gb<br>II2 D Ex db IIIC T80 Db IP66                               |
| Marking IECEx                     | Ex db IIC T6 Gb<br>Ex db IIIC T80 Db IP66                                                                                                                               |
| Marking UL844<br>(North American) | Class I, Division 1, Groups C, D<br>Class I, Division 2, Groups A, B, C, D<br>Class II, Division 1, Groups E, F, G<br>Class II, Division 2, Groups E, F, G<br>Class III |
| Marine Marking                    | UL 1598A<br>ABS and DNV Type Approved                                                                                                                                   |
| Other Rating                      | IP 66<br>IK 10                                                                                                                                                          |

## Installation

