



Industrial LED Floods

High Lumen LED Flood Light 160lm/watt

Airport



Seaport



Stadium



Gas Station



Workshop



Parking



LM79

LM80

IP66

IES



LED Floodlights 100W

Model: RT-BLLF100W-N

Power: 100 watt

LED type: Bridgelux

Efficiency: 160lm/w

Driver: Meanwell

Input voltage: 90-305VAC

CCT: 2800-7500K

Beam angle: 10,25,40,60,90 degree

Housing: 6063 Aluminum

Lens: PC material

Dimension: 386*223*90mm

Weight: 5.1kg




Operating Temperature -40-+60 °C

Lifespan: >80,000 hours

Warranty: 5years

Certification: TUV SAA ETL DLC CE RoHS

Testing report: IP66 IK10 IES LM79 LM80

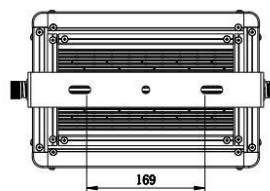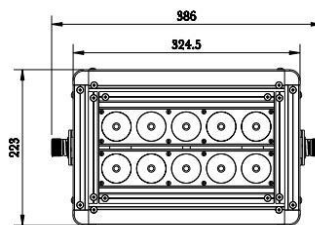



LED Floodlights 150W

Model: RT-BLLF150W-N

Power: 150 watt

LED type: Bridgelux

Efficiency: 160lm/w

Driver: Meanwell

Input voltage: 90-305VAC

CCT: 2800-7500K

Beam angle: 10,25,40,60,90 degree

Housing: 6063 Aluminum

Lens: PC material

Dimension: 386*283*90mm

Weight: 6.8kg


Operating Temperature -40-+60 °C

Lifespan: >80,000 hours

Warranty: 5years

Certification: TUV SAA ETL DLC CE RoHS

Testing report: IP66 IK10 IES LM79 LM80

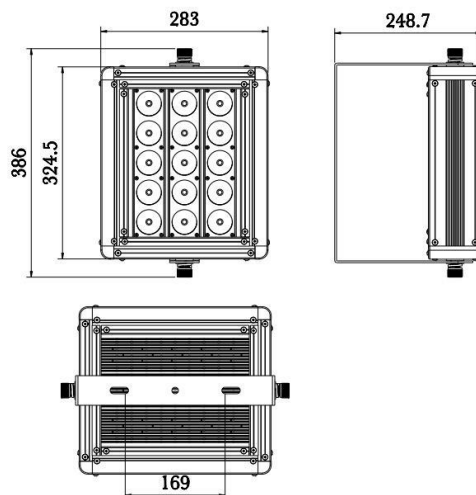



LED Floodlights 200W

Model: RT-BLLF200W-N

Power: 200 watt

LED type: Bridgelux

Efficiency: 160lm/w

Driver: Meanwell

Input voltage: 90-305VAC

CCT: 2800-7500K

Beam angle: 10,25,40,60,90 degree

Housing: 6063 Aluminum

Lens: PC material

Dimension: 386*343*90mm

Weight: 8.4kg


Operating Temperature -40~+60 °C

Lifespan: >80,000 hours

Warranty: 5years

Certification: TUV SAA ETL DLC CE RoHS

Testing report: IP66 IK10 IES LM79 LM80

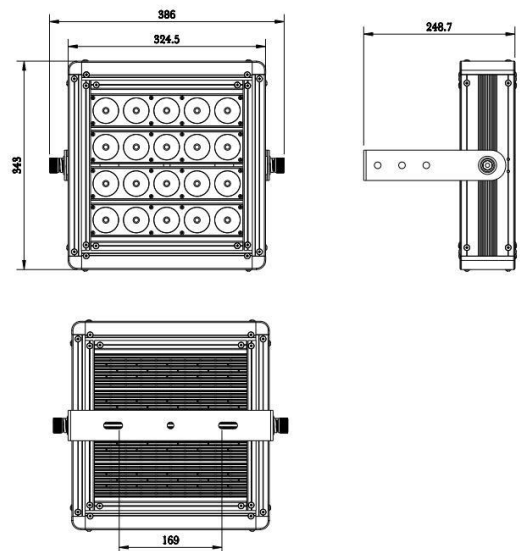



LED Floodlights 240W

Model: RT-BLLF240W-N

Power: 240 watt

LED type: Bridgelux

Efficiency: 160lm/w

Driver: Meanwell

Input voltage: 90-305VAC

CCT: 2800-7500K

Beam angle: 10,25,40,60,90 degree

Housing: 6063 Aluminum

Lens: PC material

Dimension: 386*343*90mm

Weight: 8.9kg


Operating Temperature -40~+60 °C

Lifespan: >80,000 hours

Warranty: 5years

Certification: TUV SAA ETL DLC CE RoHS

Testing report: IP66 IK10 IES LM79 LM80

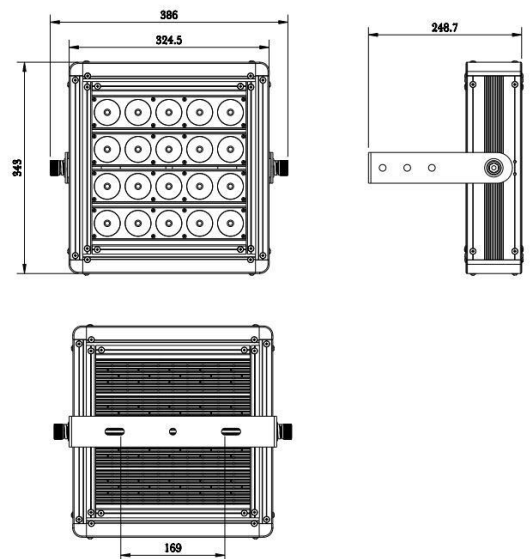



LED Floodlights 300W

Model: RT-BLLF300W-N

Power: 300 watt

LED type: Bridgelux

Efficiency: 160lm/w

Driver: Meanwell

Input voltage: 90-305VAC

CCT: 2800-7500K

Beam angle: 10,25,40,60,90 degree

Housing: 6063 Aluminum

Lens: PC material

Dimension: 404*375*90mm

Weight: 12kg


Operating Temperature -40-+60°C

Lifespan: >80,000 hours

Warranty: 5years

Certification: TUV SAA ETL DLC CE RoHS

Testing report: IP66 IK10 IES LM79 LM80



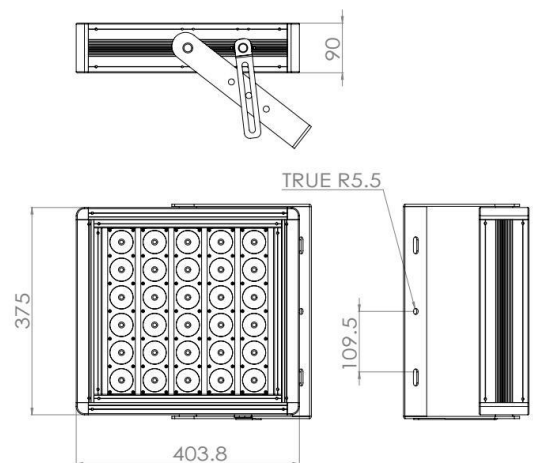




LED Floodlights 400W

Model: RT-BLLF400W-N

Power: 400 watt
LED type: Bridgelux
Efficiency: 160lm/w
Driver: Meanwell
Input voltage: 90-305VAC
CCT: 2800-7500K
Beam angle: 10,25,40,60,90 degree
Housing: 6063 Aluminum
Lens: PC material
Dimension: 475*404*90mm
Weight: 15.3kg
Operating Temperature -40-+60°C
Lifespan: >80,000 hours
Warranty: 5years
Certification: TUV SAA ETL DLC CE RoHS
Testing report: IP66 IK10 IES LM79 LM80

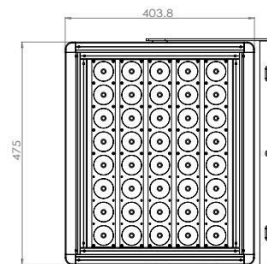





LED Floodlights 500W

Model: RT-BLLF500W-N

Power: 500 watt
LED type: Bridgelux
Efficiency: 160lm/w
Driver: Meanwell
Input voltage: 90-305VAC
CCT: 2800-7500K
Beam angle: 10,25,40,60,90 degree
Housing: 6063 Aluminum
Lens: PC material
Dimension: 536*507*90mm
Weight: 16.5kg
Operating Temperature -40-+60°C
Lifespan: >80,000 hours
Warranty: 5years
Certification: TUV SAA ETL DLC CE RoHS
Testing report: IP66 IK10 IES LM79 LM80

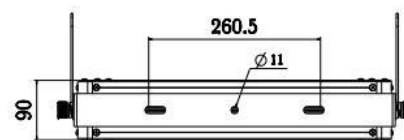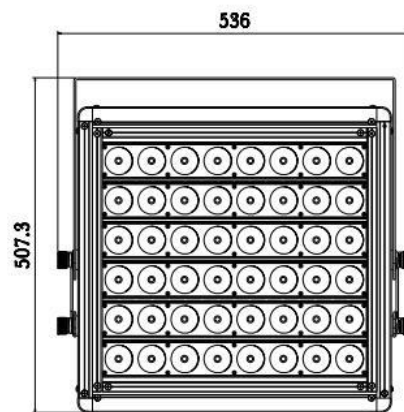



LED Floodlights 720W

Model: RT-BLLF720W-N

Power: 720 watt

LED type: Bridgelux

Efficiency: 160lm/w

Driver: Meanwell

Input voltage: 90-305VAC

CCT: 2800-7500K

Beam angle: 10,25,40,60,90 degree

Housing: 6063 Aluminum

Lens: PC material

Dimension: 736*508*90mm

Weight: 26kg


Operating Temperature -40-+60°C

Lifespan: >80,000 hours

Warranty: 5years

Certification: TUV SAA ETL DLC CE RoHS

Testing report: IP66 IK10 IES LM79 LM80

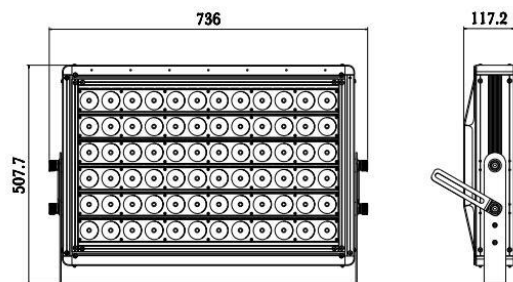




LED Floodlights 1000W

Model: RT-BLLF1000W-N

Power: 1000 watt
LED type: Bridgelux
Efficiency: 160lm/w
Driver: Meanwell
Input voltage: 90-305VAC
CCT: 2800-7500K
Beam angle: 10,25,40,60,90 degree
Housing: 6063 Aluminum
Lens: PC material
Dimension: 725*561*90mm
Weight: 30kg
Operating Temperature -40-+60°C
Lifespan: >80,000 hours
Warranty: 5years
Certification: TUV SAA ETL DLC CE RoHS
Testing report: IP66 IK10 IES LM79 LM80

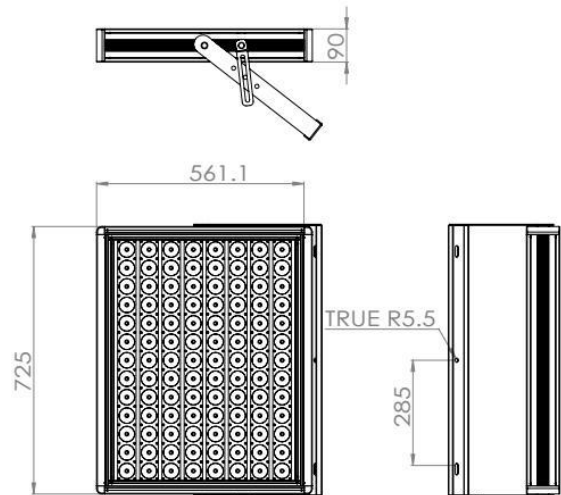



LED Floodlights 1500W

Model: RT-BLLF1500W-N

Power: 1500 watt
LED type: Bridgelux
Efficiency: 160lm/w
Driver: Meanwell
Input voltage: 90-305VAC
CCT: 2800-7500K
Beam angle: 10,25,40,60,90 degree
Housing: 6063 Aluminum
Lens: PC material
Dimension: 975*643*90mm
Weight: 45kg
Operating Temperature -40-+60°C
Lifespan: >80,000 hours
Warranty: 5years
Certification: TUV SAA ETL CE RoHS
Testing report: IP66 IK10 IES LM79 LM80

